




● Installation

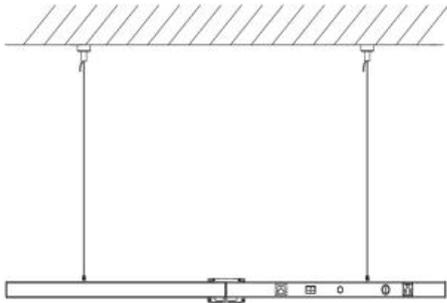


1. Hanging the lamp on the ceiling or other secure places with lifting rope.

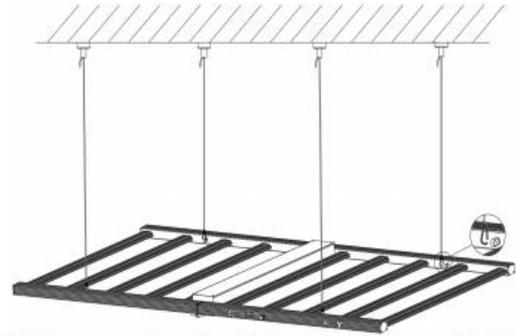


2. Please secure the four positions well with hanging ropes.

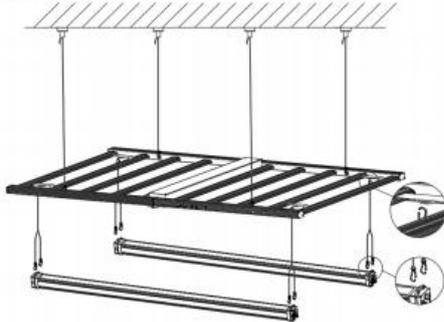


3. Place the limit buckle between the two radiators. Secure one end of the lifting rope to the limit buckle, and the other end to the light fixture beneath

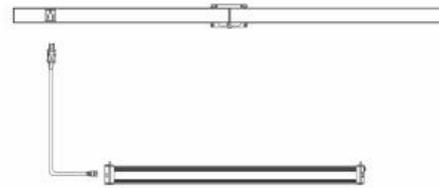

4. Connect the lower lighting fixtures on both sides to the product ports of the upper lighting fixtures using plug wires.

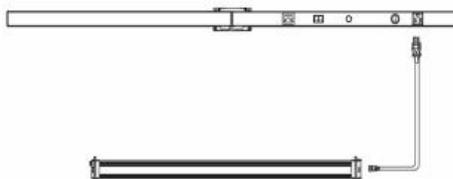


5. Connect the lower lighting fixtures on both sides to the product ports of the upper lighting fixtures using plug wires.

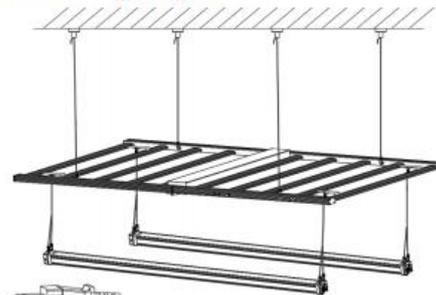

AC 100-277V

6. Insert the plug wire of the upper lighting fixture into the electrical socket to establish a connection with the power source.

● Package:

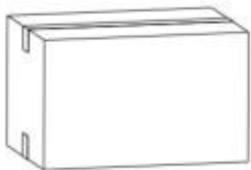

Box	QTY.	Size	N.W/CTN	G.W/CTN
box	1PC	114.5*11.5*84.8CM	16.34 KG	19.8 KG